
Huawei CloudEngine 6885H Data Center Switch Datasheet

Huawei CloudEngine 6885H series switches are next-generation high-performance and high-density 10GE/25GE/50GE access switches designed for data centers (DCs), and provide 40GE/100GE/200GE uplink ports.

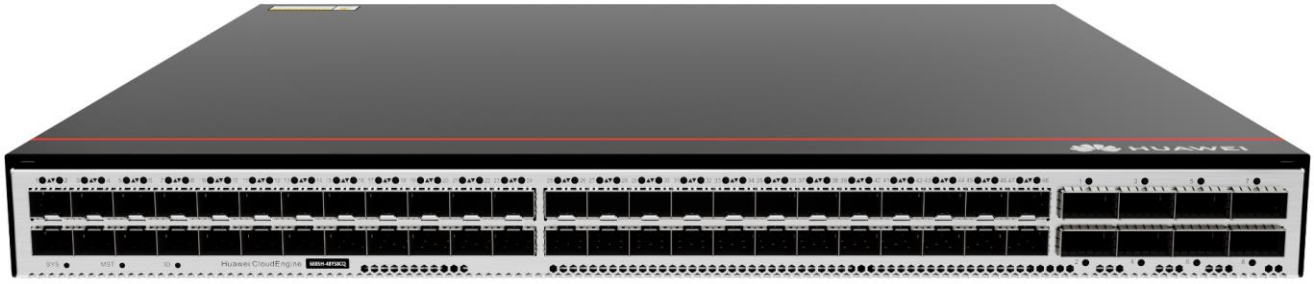

Overview


- Huawei CloudEngine 6885H series switches are next-generation high-performance and high-density 10GE/25GE/50GE access switches designed for DCs.
- CloudEngine 6885H series switches have an advanced hardware structure design, and provide high-density 10GE/25GE/50GE port access and 40GE/100GE/200GE uplink ports. The switches support extensive DC features and flexible selection of the airflow direction.
- CloudEngine 6885H series switches can work with CloudEngine 16800, 16800-X, or 8800 DC core switches to build an elastic, virtualized, high-quality, and fully-connected 40GE/100GE/200GE data center network (DCN), meeting network requirements of DCs in the cloud era.
- CloudEngine 6885H series switches provide high-density 10GE/25GE/50GE access in DCs to build DCN platforms for enterprises and carriers in the cloud era. The switches can also work as core or aggregation switches on campus networks.
- CloudEngine 6885H-48YS8CQ-T supports trusted boot based on trusted platform module (TPM).

Product Model and Appearance

CloudEngine 6885H series switches consist of the following model:

CloudEngine 6885H-48YS8CQ, CloudEngine 6885H-48YS8CQ-T(TPM)

Appearance	Description
CloudEngine 6885H-48YS8CQ  **Port side** 	• Downlink: 48 x 25GE SFP28/48 x 50GE SFP56 (25GE and 50GE ports can be configured to work at 10 Gbit/s and can be used as GE ports) • Uplink: 8 x 100GE QSFP28/8 x 200GE QSFP56 (each 100GE port can be configured to work at 40 Gbit/s, and each 200GE port can be configured to work at 100 or 40 Gbit/s)

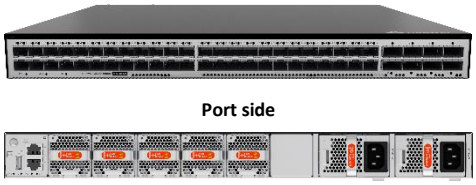Fan and power supply side	
CloudEngine 6885H-48YS8CQ-T  Port side Fan and power supply side	• Downlink: 48 x 25GE SFP28/48 x 50GE SFP56 (25GE and 50GE ports can be configured to work at 10 Gbit/s and can be used as GE ports) • Uplink: 8 x 100GE QSFP28/8 x 200GE QSFP56 (each 100GE port can be configured to work at 40 Gbit/s, and each 200GE port can be configured to work at 100 or 40 Gbit/s)

Features

High-Density Access, Providing Superior Capacity

- A CloudEngine 6885H series switch supports up to 48 x 10GE/25GE/50GE ports, ensuring high-density 10GE/25GE/50GE server access and smooth evolution.
- A CloudEngine 6885H series switch supports up to 8 x 100GE high-performance QSFP28 ports or 8 x 200GE high-performance QSFP56 ports. Each 200GE QSFP56 port can automatically adjust its rate to 40 or 100 Gbit/s. Each 100GE QSFP28 port can be used as one 40GE QSFP+ port or split into four 25GE SFP28 ports or four 10GE SFP+ ports, providing flexibility in networking. The CloudEngine 6885H switch can connect to the CloudEngine 16800-X, 16800, 9800 or 8800 series switches through 40GE/100GE/200GE uplinks to build a non-blocking network platform.

Inter-Device Link Aggregation, Ensuring High Efficiency and Reliability

- CloudEngine 6885H series switches support Multichassis Link Aggregation Group (M-LAG) to implement link aggregation among multiple devices, improving link reliability from the card level to the device level.
- Switches in an M-LAG all work in active state to share traffic and back up each other, enhancing system reliability.
- Switches in an M-LAG system can be upgraded independently. During the upgrade, other switches in the system take over traffic forwarding to ensure uninterrupted services.
- M-LAG supports dual-homing to Ethernet, VXLAN, and IP networks, allowing for flexible networking.

Virtualized Hardware Gateway, Achieving Rapid Deployment

- CloudEngine 6885H series switches can work with the industry's mainstream virtualization platforms. When functioning as high-performance hardware gateways on an overlay network (VXLAN), CloudEngine 6885H series switches can support the operations of a DC with up to 16 million tenants.
- When functioning as hardware gateways on an overlay network, CloudEngine 6885H series switches can connect to cloud platforms through open APIs, facilitating unified management of virtual and physical networks.
- The hardware virtualized gateway solution achieves rapid service deployment without having to change the customer network, protecting customer investments.
- CloudEngine 6885H series switches support Border Gateway Protocol - Ethernet VPN (BGP-EVPN), which can run as the VXLAN control plane to simplify VXLAN configuration within and between DCs.

Standard Interfaces, Enabling Open Interconnection

- CloudEngine 6885H series switches support NETCONF and can interconnect with iMaster NCE-Fabric.
- CloudEngine 6885H series switches support Ansible — an automatic management and O&M tool — to implement unified provisioning of physical and virtual networks.
- CloudEngine 6885H series switches are integrated with mainstream cloud platforms (including commercial and open-source cloud platforms) and third-party controllers, enabling flexible service customization and automatic management.

Zero Touch Provisioning, Enabling Automatic O&M

- CloudEngine 6885H series switches support Zero Touch Provisioning (ZTP). ZTP enables the switches to automatically obtain and load version files from a file server, freeing network engineers from onsite configuration and deployment. ZTP reduces labor costs and improves device deployment efficiency.
- ZTP supports embedded script languages and provides them for users through open APIs. DC users can use a familiar programming language (such as Python) to centrally configure network devices.
- ZTP decouples the configuration time of new devices from device quantity and geographical distribution, shortening the service provisioning time and improving the service provisioning efficiency.

Intelligent O&M Through Collaboration with iMaster NCE-FabricInsight

- CloudEngine 6885H series switches support telemetry technology to collect device data in real time and send the collected data to iMaster NCE-FabricInsight — the DCN analysis component of Huawei iMaster NCE. Leveraging the intelligent fault identification algorithm, iMaster NCE-FabricInsight can analyze network data, accurately display the real-time network status, locate faults and identify their root causes in a timely and effective manner, and detect network problems that can affect user experience, precisely guaranteeing user experience.
- CloudEngine 6885H series switches support insertion of IFIT extension headers into packets, path visualization, and interface-level analysis of packet loss, traffic, and latency. This helps to achieve high-precision service-level packet loss detection and facilitate fault demarcation.
- CloudEngine 6885H series switches support Packet Event. When a device discards packets due to reasons such as abnormal forwarding, specified packet discarding rules, a full buffer, or ACL rule deny actions, or when the latency of packets exceeds a specified threshold, the device reports related flow entries to the iMaster NCE-FabricInsight collector.

Simplified DCN Deployment via Collaboration with iMaster NCE-Fabric

- CloudEngine 6885H series switches can interconnect with iMaster NCE-Fabric through standard protocols such as NETCONF and SNMP to adapt to networks and implement automatic network management. This helps to provide more efficient and intelligent operation methods, simplifying network management, and reducing the OPEX.

Intelligent Lossless Network, Meeting High Performance Requirements of RoCEv2 Applications

- CloudEngine 6885H series switches support the iLossless algorithm to eliminate packet loss on the conventional Ethernet. This helps to build a lossless, low-latency, and high-throughput network environment for RoCEv2 traffic, meeting high performance requirements of RoCEv2 applications.
- CloudEngine 6885H series switches support PFC deadlock prevention. The switches can identify service flows that may cause PFC deadlocks and change queue priorities of these flows to prevent PFC deadlocks.
- CloudEngine 6885H series switches support Artificial Intelligence Explicit Congestion Notification (AI ECN). This future-oriented function can intelligently adjust the ECN thresholds of lossless queues based on the live-network traffic model to ensure low latency and high throughput with zero packet loss, maximizing the performance of lossless services.
- CloudEngine 6885H series switches support ECN Overlay. ECN Overlay applies ECN to a VXLAN network, enabling the traffic receiver to detect congestion on the overlay network in a timely manner and instruct the traffic sender to reduce its packet sending rate to relieve network congestion.

Flexible Airflow Design, Improving Energy Efficiency

Flexible front to back/back to front airflow design:

- CloudEngine 6885H series switches use a strict front-to-rear airflow design that isolates cold air channels from hot air channels, meet heat dissipation requirements in DC equipment rooms.
- Air can flow from front to rear or from rear to front depending on the fan modules and power modules in use.
- Redundant power modules and fan modules can be configured to ensure service continuity.

Innovative energy-saving technologies:

- CloudEngine 6885H series switches use energy-saving chips and an intelligent fan speed control scheme to measure system power consumption in real time. This can reduce O&M costs and help to build a green DC.

Clear Indicators, Simplifying O&M

Clear indicators:

- The innovative port indicators can clearly show the port status, port speed, and status of all sub-interfaces.
- State and stack indicators on both the front and rear panels enable users to maintain the switch from either side.
- CloudEngine 6885H series switches support remote positioning. Users can turn on the remote positioning indicator through the network management system (NMS) or console to easily identify the switches they want to maintain in an equipment room full of devices.

Simple maintenance:

- The management port, fan modules, and power modules are on the front panel, which facilitates device maintenance.
- Data ports are located at the rear, facing servers. This facilitates cabling.

License Authorization

CloudEngine 6885H series switches support the CloudFabric IDN One Software (N1) business model, which bundles iMaster NCE-Fabric, iMaster NCE-FabricInsight, and CloudEngine switches in a range of typical scenarios. This approach simplifies transactions, provides customers with more functions and value, and protects customers' software investment through Software License Portability.

Feature	N1 Software Package (Mandatory)			N1 Add-On Package (Optional)							
	Found-ation	Advan-ced	Prem-ium	TCP Acceleration	distributed storage	Security	Multi-Cloud and Multi-DC	Specified Flow Analysis	xFlow Intelligent Full-flow Analysis	Financial-grade High Availability	Digital Map
Basic functions (including IPv6 and VXLAN)	●	●	●								
Telemetry	●	●	●								
PTP	●	●	●								
Multicast NAT		●	●								
M-LAG virtual peer-link	●	●	●								
MACsec						●					
AI ECN 2.0					●						
TCP optimization				●	●						
NSLB											
MoFRR										●	
Adaptive routing											
Automation	●	●	●								
Basic intent functions			●								
Runbook		●	●								
Multi-cloud and multi-DC automation scenario package							●				
Basic digital map functions											●
Basic network analysis functions	●	●	●								
Network health evaluation		●	●								
Value-added functions of network traffic analysis (100 VMs)			●					●			
IFIT service assurance		●	●								
Value-added functions of network traffic analysis (1000 VMs)									●		
Value-added package of multi-cloud and multi-DC analysis scenarios							●				
Version mapping	Select one from the three packages. The Advanced package contains features of the Foundation package, and the Premium package contains the features of the Advanced package.			Used together with the Foundation, Advanced, or Premium package.							

Product Specifications

Item	CloudEngine 6885H-48YS8CQ	CloudEngine 6885H-48YS8CQ-T
Device virtualization	M-LAG	
Interface	Jumbo frames	
Network virtualization	VXLAN routing and VXLAN bridging	
	BGP-EVPN	
SDN	iMaster NCE-Fabric	
Network convergence	PFC and AI ECN	
	RDMA and RoCE (RoCE v1 and RoCE v2)	
Programmability	OpenFlow	
	OPS programming	
Traffic analysis	NetStream	
VLAN	Access, trunk, and hybrid ports	
	Default VLAN	
MAC address table	Automatic MAC address learning and aging	
	Static, dynamic, and blackhole MAC address entries	
	Source MAC address filtering	
	MAC address learning limiting based on ports and VLANs	
IP routing	IPv4 dynamic routing protocols such as RIP, OSPF, IS-IS, and BGP	
	IPv6 dynamic routing protocols such as RIPng, OSPFv3, IS-ISv6, and BGP4+	
IPv6	VXLAN over IPv6	
	IPv6 VXLAN over IPv4	
	IPv6 neighbor discovery (ND)	
	Path MTU discovery (PMTU)	
	TCP6, IPv6 ping, IPv6 tracert, IPv6 socket, UDP6, and raw IPv6	
Multicast	Multicast routing protocols such as IGMP, PIM-SM, and MSDP	
	IGMP snooping and IGMP proxy	
	IPv6 Layer 3 multicast and configuration of both Layer 2 and Layer 3 multicast services	
	Fast leave of multicast member interfaces	
	Multicast traffic suppression	

Reliability	LACP
	STP, RSTP, VBST, and MSTP
	BPDU protection
	Smart link and multi-instance
	Hardware-based Bidirectional Forwarding Detection (BFD), with a minimum packet sending interval of 3.3 ms
	VRRP, VRRP load balancing, and BFD for VRRP
	BFD for BGP, IS-IS, OSPF, and static routing
	BFD for VXLAN
QoS	Traffic classification based on Layer 2 headers, Layer 3 protocols, and Layer 4 protocol priorities
	ACL, CAR, re-marking, and scheduling
	Queue scheduling modes such as PQ, DRR, and PQ+DRR
	Congestion avoidance mechanisms such as WRED and tail drop
	Traffic shaping
	IEEE 1588v2
Intelligent O&M	Network-wide path detection
	Telemetry
	Enhanced ERSPAN
	IFIT
	Packet Event: packet loss visualization and ultra-long latency visualization
	Statistics collection on the buffer microburst status
	VXLAN OAM: VXLAN ping and VXLAN tracert
Intelligent lossless network	PFC deadlock prevention
	AI ECN
	ECN Overlay
	Enhanced NSLB
Configuration and maintenance	Terminal login through the console port, Telnet, and SSH
	Network management protocols, such as SNMPv1/v2/v3
	File upload and download through FTP and TFTP
	Boot Read-Only Memory (BootROM) upgrade and remote online upgrade

	Hot patches	
	User operation logs	
	Configuration rollback	
	ZTP	
Security and management	MACsec	
	Command line authority control based on user levels, preventing unauthorized users from using commands	
	Defense against DoS, ARP, and ICMP attacks	
	Port isolation, port security, and sticky MAC	
	Binding of the IP address, MAC address, port ID, and VLAN ID	
	Authentication methods, including AAA, LDAP, RADIUS, and HWTACACS	
	/	TPM
	RMON	

By default, a CE6885H-48YS8CQ switch supports forty-eight 25GE ports and eight 100GE ports. To use them as forty-eight 50GE ports and eight 200GE ports, the CE68-RTU-U48S8CQ needs to be purchased.

Performance and Scalability

Item	Value
Maximum number of MAC address entries	640K
Maximum number of routes (FIB IPv4/IPv6)	1.5M/750K
ARP size	128K
Maximum number of VRFs	4096
IPv6 ND table size	128K
Maximum number of multicast routes (multicast FIB IPv4/IPv6)	32K/16K
Maximum number of VRRP groups	1024
Maximum number of ECMP paths	128
Maximum number of ACLs	34K@160 bits (inbound) + 2K@320 bits (outbound) (K = 1024)
Maximum number of VXLAN bridge domains	16K

Maximum number of BDIF interfaces	16K
Maximum number of virtual tunnel endpoints (VTEPs)	16K
Maximum number of LAGs	1024
Maximum number of links in a LAG	256
Maximum number of VLANs where VBST can be configured	1000

Note: This specification may vary between different scenarios. Please contact Huawei for details.

Hardware Specifications

Item		CloudEngine 6885-48YS8CQ/ CloudEngine 6885-48YS8CQ-T
Physical features	Dimensions (H x W x D)	43.6 mm x 442.0 mm x 420.0 mm
	Weight without packaging (full configuration) [kg (lb)]	8.55
	Switching capacity (Tbps)	8
	Forwarding performance (Mpps)	1200
10/25GE SFP28 ports		48
40/100GE QSFP28 ports		8
Management interface	Console port	1 x RJ45 interface
	USB port	1
CPU	Number of cores	16
Buffer	System Buffer	32.5 MB
Power supply	Power modules	600 W AC&240 V DC power module: 600 W 1200 W DC power module: 1200 W
	Rated input voltage [V]	600 W AC&240 V DC power module: 100 V AC to 240 V AC, 50/60 Hz; 240 V DC 1200 W DC power module: –48 V DC to –60 V DC; +48 V DC
	Input voltage range [V]	600 W AC&240 V DC power module: 90 V AC to 290 V AC, 45 Hz to 65 Hz; 190 V DC to 290 V DC 1200 W DC power module: -38.4 V DC to -72 V DC; +40 V DC to +57 V DC
	Maximum input current	AC 600 W: 100 V to 240 V 8 A 1000 W -48 V DC: -48 to 60 V 30A 1200 W 380 V HVDC: 190 V 8A
	Typical power	207 W (100% traffic load, copper cables on 24 x 25GE + 4 x 100GE ports, normal temperature, dual AC power modules) 218 W (100% traffic load, short-distance optical modules on 24 x

Item		CloudEngine 6885-48YS8CQ/ CloudEngine 6885-48YS8CQ-T
		25GE + 4 x 100GE ports, normal temperature, dual AC power modules)
	Maximum power	255 W (100% traffic load, short-distance optical modules on all ports, normal temperature, dual AC power modules) 372 W (100% traffic load, long-distance optical modules on all ports, high temperature, dual AC power modules)
	Frequency (AC, Hz)	50/60
Heat dissipation	Heat dissipation mode	Air cooling
	Number of fans	5
	Heat dissipation airflow	Front-to-back or back-to-front airflow
Environment specifications	Long-term operating temperature (°C)	0°C to 40°C (0-1800 m) The temperature decreases by 1°C each time the altitude increases by 220 m.
	Storage temperature (°C)	-40°C to +70°C
	Storage relative humidity (RH)	5% to 95%
	Operating altitude (m)	Up to 5000
	Noise at normal temperature (27°C, sound pressure) (dBA)	Front-to-back airflow: Average: 52.8 dB(A); max: 58.7 dB(A) Back-to-front airflow: Average: 51.3 dB(A); max: 59.0 dB(A)
	Noise at high temperature (40°C, sound pressure) (dBA)	Front-to-back airflow: Average: 69.5 dB(A); max: 76.0 dB(A) Back-to-front airflow: Average: 70.2 dB(A); max: 75.6 dB(A)
	Surge protection	AC power supply protection: 6 kV in common mode and 6 kV in differential mode DC power supply protection: 4 kV in common mode and 2 kV in differential mode
Reliability	MTBF (year)	44.34
	MTTR (hour)	2
	Availability	0.9999948505

Safety and Regulatory Compliance

The following table lists the safety and regulatory compliance of CloudEngine 6800 series switches.

Certification Category	Description
Safety	EU CE: 2006/95/EC, EN 60950-1 Germany GS: EN 60950-1 CB: IEC 60950-1 USA UL: UL 60950-1 Canada CUL: CSA C22.2 No. 60950-1 Australia RCM: AS/NZS 60950-1 China CCC: GB 4943
Electromagnetic Compatibility (EMC)	EU CE: 2014/30/EU, EN55032, EN 55024, and EN 300386 US FCC: 47CFR Part 15 Canada IC: ICES-003 Australia C-Tick: AS/NZS CIPSR22 Japan VCCI: VCCI-3 and VCCI-4 China CCC: GB 9254
Environment	EU ROHS: 2002/95/EC & 2011/65/EU EU REACH: 1907/2006/EC EU WEEE: 2002/96/EC China RoHS: GB/T 26572
EMC: electromagnetic compatibility; CISPR: International Special Committee on Radio Interference EN: European Standard; ETSI: European Telecommunications Standards Institute CFR: Code of Federal Regulations; FCC: Federal Communication Commission IEC: International Electrotechnical Commission AS/NZS: Australian/New Zealand Standard; VCCI: Voluntary Control Council for Interference UL: Underwriters Laboratories; CSA: Canadian Standards Association	

Ordering Information


Device Description	
CE6885H-48YS8CQ	CE6885H-48YS8CQ switch (48 x 25GE SFP28, 8 x 100GE QSFP28, without fan and power module)
CE6885H-48YS8CQ-B	CE6885H-48YS8CQ switch (48 x 25GE SFP28, 8 x 100GE QSFP28, 2 x AC power modules, 5 x fan modules, port-side air intake)
CE6885H-48YS8CQ-F	CE6885H-48YS8CQ switch (48 x 25GE SFP28, 8 x 100GE QSFP28, 2 x AC power modules, 5 x fan modules, port-side air exhaust)
Fan module	
Model	**Description**
FAN-031A-F	Fan box (F,FAN panel side intake)
FAN-031A-B	Fan box (B,FAN panel side exhaust)
FAN-031B-F	Fan box (F,FAN panel side intake), supporting the electronic label function
FAN-031B-B	Fan box (B,FAN panel side exhaust), supporting the electronic label function
Power module	
Model	**Description**
PAC600S12-PF	600W AC Power Module (Front to Back, Power panel side intake)
PAC600S12-PB	600W AC Power Module (Back to Front, Power panel side exhaust)
PDC1K2S12-PB	1200W DC Power Module (Front to Back, Power panel side intake)
PDC1K2S12-CE	1200W DC Power Module (Back to Front, Power panel side exhaust)

Software	
Hardware RTU	
CE68-RTU-U48S8CQ	Downlink ports: 48 x 25GE upgraded to 48 x 50GE; Uplink ports: 8 x 100GE upgraded to 8 x 200GE
Software	
N1-CE68LIC-CFFD	N1-CloudFabric Foundation SW License for CloudEngine 6800
N1-CE68CFFD- SnS1Y	N1-CloudFabric Foundation SW License for CloudEngine 6800-SnS-Year
N1-CE68LIC-CFAD	N1-CloudFabric Advanced SW License for CloudEngine 6800
N1-CE68CFAD- SnS1Y	N1-CloudFabric Advanced SW License for CloudEngine 6800-SnS-Year
N1-CE68LIC-CFPM	N1-CloudFabric Premium SW License for CloudEngine 6800
N1-CE68CFPM- SnS1Y	N1-CloudFabric Premium SW License for CloudEngine 6800-SnS-Year
N1-CE68UPG-F-A	N1-CloudEngine 6800 Upgrade SW License:Foundation to Advanced
N1-CE68UGFA- SnS1Y	N1-CloudEngine 6800 Upgrade SW License:Foundation to Advanced-SnS-Year
N1-CE68UPG-A-P	N1-CloudEngine 6800 Upgrade SW License:Advanced to Premium
N1-CE68UGAP- SnS1Y	N1-CloudEngine 6800 Upgrade SW License:Advanced to Premium-SnS-Year
N1-CE68LIC-AFRD-2	N1-CloudEngine 6800 AI Fabric RDMA Application Acceleration Function 2
N1-CE68AFRD2- SnS1Y	N1-CloudEngine 6800 AI Fabric RDMA Application Acceleration Function 2-SnS-Year
N1-CE68LIC-SEC	N1-CloudEngine 6800 Security Function
N1-CE68SEC-SnS1Y	N1-CloudEngine 6800 Security Function-SnS-Year
N1-CE-F-LIC-MDCA	N1-CloudEngine Data Center Switch Multi-cloud Multi-DC Value-added Package - Fixed
N1-CEFMDCA - SnS1Y	N1-CloudEngine Data Center Switch Multi-cloud Multi-DC Value-added Package, Per Fixed device-SnS-Year
N1-CE-LIC-AFP100VM	N1-CloudEngine Specified Flow Analysis Value-added Package Per 100 VM
N1-CEAFP100VM-SnS1Y	N1-CloudEngine Specified Flow Analysis Value-added Package Per 100 VM-SnS-Year

Networking Application

Application in a DC

On a typical DCN, CloudEngine 16800-X, 16800 or 8800 switches work as core switches, whereas CloudEngine 6885H series switches work as TOR switches and connect to the core switches through 40GE, 100GE, or 200GE ports to build an end-to-end and fully-connected 100GE/200GE/400GE network. The switches use VXLAN and other fabric technologies to establish a non-blocking large Layer 2 network, which allows large-scale VM migrations and flexible service deployments.

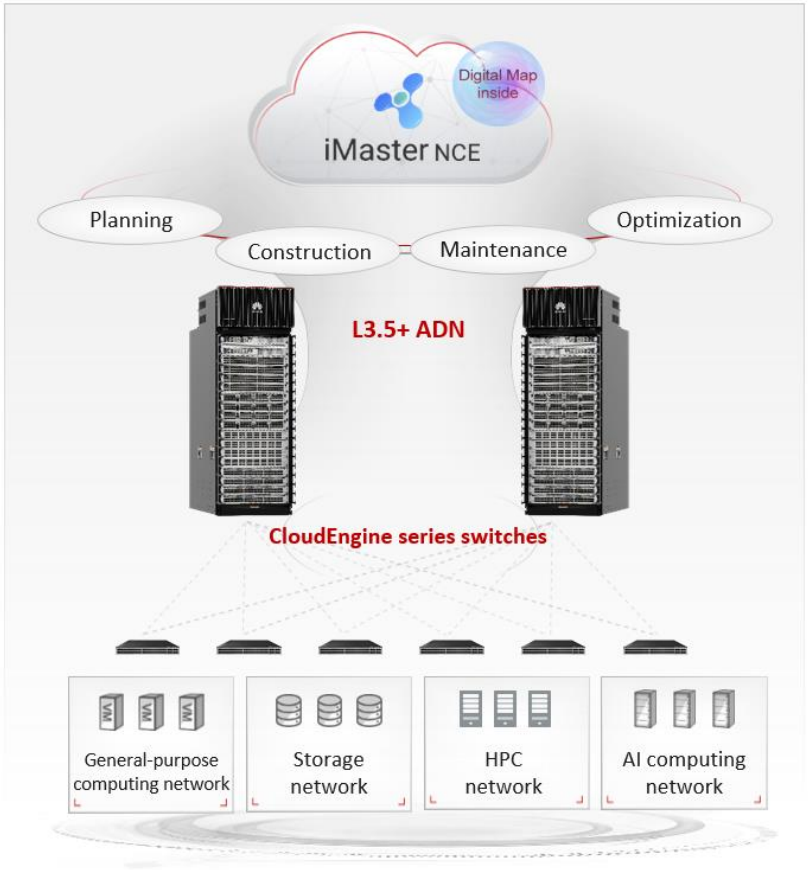

More Information

For more information about Huawei products, visit https://e.huawei.com/en/ or contact Huawei's local sales office.

Alternatively, you can contact us through one of the following methods:

- Global service hotline: https://e.huawei.com/en/about/service-hotline
- Enterprise technical support website: https://support.huawei.com/enterprise/en/index.html
- Service email address for enterprise users: support_e@huawei.com

Copyright © Huawei Technologies Co., Ltd. 2023. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior writtenconsent of Huawei Technologies Co., Ltd.

Trademarks and Permissions

HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Huawei Technologies Co., Ltd. Address:

Huawei Industrial Base Bantian,Longgang

Shenzhen 518129 People's Republic of China

Website: www.huawei.com