CloudEngine 7800 Series Data Center Switches



HUAWEI TECHNOLOGIES CO., LTD.

HUAWEI

CloudEngine 7800 Series Data Center Switches

Product Overview

Huawei CloudEngine 7800 series (CE7800 for short) switches are next-generation 40G Ethernet switches designed for data centers and high-end campus networks, providing high-performance, high-density 40GE ports, and low latency. The CE7800 has an advanced hardware architecture with 40GE QSFP+ ports.
Using the Huawei VRP8 software platform, CE7800 switches provide extensive data center service features and high stacking capability. In addition, the airflow direction (front-to-back or back-to-front) can be changed. CE7800 switches can work with CE12800/8800/6800/5800 switches to build an elastic, virtualized, high-quality fabric that meets the requirements of cloud-computing data centers.
CE7800 switches can function as core or aggregation switches on data center networks to help enterprises and carriers build a scalable data center network platform in the cloud computing era. They can also be used as aggregation or core switches for enterprise campus networks.

Product Appearance

The CE7800 comes in two models.

CE7850-32Q-EI



32*40GE QSFP+ ports

CE7855-32Q-EI



32*40GE QSFP+ ports

Product Characteristics

High-density 40GE Access

- The CE7800 provides 2.56 Tbit/s switching capacity in a 1 U ToR, 1,440 Mpps forwarding performance, and supports L2/L3 line-rate forwarding.
- The CE7800 provides a maximum of 32*40GE QSFP+ ports, and can function as the core or aggregation switch on a data center or campus network.
- The QSFP+ port can be used as four 10GE SFP+ ports, providing a flexible network. CE7800 switches can work with CE12800/6800/5800 switches to build a non-blocking network platform.

Highly Reliable, High-Performance Stacking

- The industry's first 16-member stack system
  - » A stack system of 16 member switches has a maximum of 512*40GE access ports that provide high-density server access in a data center.
  - » Multiple switches in a stack system are virtualized into one logical device, making it possible to build a scalable, easy-to-manage data center network platform.
  - » A stack system separates the control plane from the data plane. This eliminates the risk of single-point failures and greatly improves system reliability.
- Long-distance stacking
  - » The CE7800 can use service ports as stack ports. A stack system can be established with switches in the same rack or different racks, and even over long distances.
  - » Service and stack bandwidths can be allocated based on the network's scale so that network resources can be used more efficiently.

Vertical Virtualization Simplifies Management

- The CE7800 supports Super Virtual Fabric (SVF), which can virtualize multiple physical switches of the same or different types into one logical switch to simplify network management and improve reliability.
- SVF implements vertical extension of heterogeneous switches and virtualizes multiple leaf switches into remote cards of the spine switch, making it easier to install cables in equipment rooms and manage devices. The CE7800 functions as the spine switch.
- Huawei's SVF is the first in the industry to implement local forwarding of leaf switches. When horizontal traffic is the mainstream traffic in a data center, SVF improves forwarding efficiency and reduces network delay.

Inter-device Link Aggregation, High Efficiency and Reliability

- The CE7800 supports multichassis link aggregation group (M-LAG), which enables links of multiple switches to aggregate into one to implement device-level link backup.
- Switches in an M-LAG system all work in active state to share traffic and back up each other, enhancing system reliability.
- Switches in an M-LAG system can be upgraded independently. During the upgrade, other switches in the system take over traffic forwarding to ensure uninterrupted services.
- M-LAG supports dual-homing to Ethernet, TRILL, VXLAN, and IP networks, allowing for flexible networking.

Large-Scale Routing Bridge, On-Demand Scaling

- The CE7800 supports the IETF Transparent Interconnection of Lots of Links (TRILL) protocol. A TRILL network can contain more than 500 nodes, enabling flexible service deployments and large-scale Virtual Machine (VM) migrations.
- The TRILL protocol uses a routing mechanism similar to IS-IS and sets a limited Time-to-Live (TTL) value in packets to prevent Layer 2 loops. This significantly improves network stability and speeds up network convergence.

- On a TRILL network, all data flows are forwarded quickly using Shortest Path First (SPF) and Equal-cost Multi-path (ECMP) routing. SPF and ECMP avoid the suboptimal path selection problem in STP and increase link bandwidth efficiency to 100 percent.
- The CE7800 supports TRILL-based Layer 2 equal-cost paths, greatly improving links' load balancing capabilities. The network has a fat-tree architecture that enhances expansion.

Converged Enhanced Ethernet, Allowing for Data, Storage, and Computing Traffic on One Network

- The CE7800 supports Fibre Channel over Ethernet (FCoE), which permits storage, data, and computing services to be transmitted on one network, reducing the costs of network construction and maintenance.
- The CE7800 supports centralized FCoE/FC gateway deployment, which makes network O&M simpler.
- The CE7800 series switches support multiple data center features: Priority-based Flow Control (PFC), Enhanced Transmission Selection (ETS) and Data Center Bridging eXchange (DCBX). These features ensure low latency and zero packet loss for FC storage and high-speed computing services.

Fast VM Migration, Policy Mobility

- The CE7800 works with Huawei's Agile Controller to permit network policies to be dynamically deployed on the CE7800. Agile Controller also supports online VM migration.
- Agile Controller delivers network policies through high-speed RADIUS interfaces. Its online VM migration is 10 to 20 times the rate of other industry platforms, enabling large-scale VM migrations.
- Agile Controller is based on open APIs and is compatible with all major virtualization platforms including VMware.

Full Openness and Programmability, Flexible Customization

- The CE7800 uses the Open Programmability System (OPS) embedded in the VRP8 software platform to provide programmability at the control plane.
- The OPS provides open APIs. APIs can be integrated with mainstream cloud platforms (including commercial and open cloud platforms) and third-party controllers. The OPS enables services to be flexibly customized and provides automatic management.
- Users or third-party developers can use open APIs to develop and deploy specialized network management policies to implement extension of fast service functions, automatic deployment, and intelligent management. The OPS also implements automatic operation and maintenance, and reduces management costs.
- The CE7800 supports Puppet automation software, which enables unified provisioning of physical and virtual networks.
- CE7800 switches can seamless integrate with systems of F5, an industry-leading application delivery network provider, to build an active-active data center network.
- The OPS provides seamless integration of data center service and network in addition to a service-oriented, Software-Defined Network (SDN).

Hardware Overlay Gateway Achieves Fast Service Deployment

- The CE7800 can work with a mainstream virtualization platform. As the high-performance, hardware gateway of an overlay network (VXLAN), the CE7800 can support more than 16 million tenants.

- The CE7800 can connect to a cloud platform through open API to provide unified management of software and hardware networks.
- The hardware gateway deployment enables fast service deployment without changing the customer network, providing investment protection.
- The CE7800 supports Border Gateway Protocol - Ethernet VPN (BGP-EVPN), which can run as the VXLAN control plane to simplify VXLAN configuration within and between data centers.

Zero Touch Provisioning, Automatic O&M

- The CE7800 supports Zero Touch Provisioning (ZTP). ZTP enables the CE7800 to automatically obtain and load version files from a USB flash drive or file server, freeing network engineers from onsite configuration or deployment. ZTP reduces labor costs and improves device deployment efficiency.
- ZTP provides built-in scripts for users through open APIs. Data center personnel can use the programming language they are familiar with, such as Python, to provide unified configuration of network devices.
- ZTP decouples configuration time of new devices from device quantity and area distribution, which improves service provisioning efficiency.

Flexible Airflow Design, High Energy Efficiency

- Flexible front-to-back/back-to-front airflow design
  - » The CE7800 uses a front-to-back/back-to-front airflow design that isolates cold air channels from hot air channels. This design meets heat dissipation requirements in data center equipment rooms.
  - » Air can flow from front to back, or back to front when different fans and power modules are used.
  - » Redundant power modules and fans can be configured to ensure uninterrupted service transmission.
- Innovative energy-saving technology
  - » The CE7800 has energy-saving chips and can measure system power consumption in real time. Fan speed can be adjusted dynamically based on system consumption. These energy-saving technologies reduce O&M costs and contribute to a greener data center.

Clear Indicators, Simple Maintenance

- Clear indicators
  - » Port indicators clearly show port status and port speeds. The 40GE port indicators can show the state of all the 10GE ports derived from the 40GE ports.
  - » State and stack indicators on both the front and rear panels enable operators to maintain the switch from either side.
  - » The CE7800 supports remote positioning. Operators can turn on remote positioning indicators on the switches they want to maintain, so that they can find switches easily in an equipment room full of devices.
- Simple maintenance
  - » The management port, fans, and power modules are on the front panel, which facilitates device maintenance.
  - » Data ports are located at the rear, facing servers. This simplifies cabling.

Product Specifications

Item	CE7850-32Q-EI	CE7855-32Q-EI
Ports	32 *40GE QSFP+	
Switching capacity	2.56 Tbit/s	
Forwarding rate	1,440 Mpps	
Airflow design	Front-to-back or back-to-front	
Device virtualization	iStack[1]	
	SVF[2]	
Network virtualization	M-LAG	
	TRILL	
	VXLAN routing and bridging	
	BGP-EVPN	
VM-awareness	Agile Controller	
Network convergence	FCoE	
	DCBX, PFC, ETS	
Programmability	OpenFlow	
	OPS	
	Puppet, and OVSDB plugins released on open source websites	
	Linux containers for open-source and customized programming	
Traffic analysis	NetStream	
	sFlow	
VLAN	Adding access, trunk, and hybrid interfaces to VLANs	
	Default VLAN	
	QinQ	
	MUX VLAN	
	GARP VLAN registration protocol(GVRP)	
ACL	Ingress3750; Egress 1000	Ingress14750; Egress 1000

1 For details about the configuration, please see: http://support.huawei.com/onlinetoolsweb/virtual/en/dc/stack_index.html?dcb
2 For details about the configuration, please see: http://support.huawei.com/onlinetoolsweb/virtual/en/dc/svf_index.html?dcb

Item	CE7850-32Q-EI	CE7855-32Q-EI
MAC address table	Maximum:288k	Maximum:288k
	Dynamic learning and aging of MAC addresses	
	Static, dynamic, and blackhole MAC address entries	
	Packet filtering based on source MAC addresses	
	MAC address limiting based on ports and VLANs	
ARP	Maximum:128k	Maximum:128k
IPv4 FIB	Maximum:256k	Maximum:256k
IP routing	IPv4 routing protocols, such as RIP, OSPF, BGP, and IS-IS	
	IPv6 routing protocols, such as RIPng, OSPFv3, IS-ISv6, and BGP4+	
IPv6 FIB	Maximum:128k	Maximum:128k
IPv6	IPv6 Neighbor Discovery (ND)	
	Path MTU Discovery (PMTU)	
	TCP6, ping IPv6, tracert IPv6, socket IPv6, UDP6, and Raw IP6	
Multicast FIB	Maximum:8k	Maximum:8k
Multicast	IGMP, PIM-SM, PIM-DM, MSDP, and MBGP	
	IGMP snooping	
	IGMP proxy	
	Fast leave of multicast member interfaces	
	Multicast traffic suppression	
	Multicast VLAN	
MPLS	MPLS	
Reliability	LACP	
	STP, RSTP, VBST, and MSTP	
	BPDU protection, root protection, and loop protection	
	Smart Link and multi-instance	
	DLDP	
	ERPS (G.8032)	
	VRRP, VRRP load balancing, and BFD for VRRP	
	BFD for BGP/IS-IS/OSPF/Static route	

Item	CE7850-32Q-EI	CE7855-32Q-EI
QoS	Traffic classification based on Layer 2 headers, Layer 3 protocols, Layer 4 protocols, and 802.1p priority	
	Actions of ACL, CAR, re-marking, and scheduling	
	Queue scheduling algorithms, including PQ, WRR, DRR, PQ+WRR, and PQ+DRR	
	Congestion avoidance mechanisms, including WRED and tail drop	
	Traffic shaping	
Configuration and maintenance	Console, Telnet, and SSH terminals	
	Network management protocols, such as SNMPv1/v2c/v3	
	File upload and download through FTP and TFTP	
	BootROM upgrade and remote upgrade	
	802.3az Energy Efficient Ethernet (EEE)	
	Hot patches	
	User operation logs	
	Zero Touch Provisioning (ZTP)	
Security and management	802.1x authentication	
	Command line authority control based on user levels, preventing unauthorized users from using commands	
	DoS, ARP, and ICMP attack defenses	
	Port isolation, port security, and sticky MAC	
	Binding of the IP address, MAC address, interface number, and VLAN ID	
	Authentication methods, including AAA, RADIUS, and HWTACACS	
	Remote Network Monitoring (RMON)	
Dimensions (W x D x H)	442 mm x 607 mm x 43.6 mm	442 mm x 607 mm x 43.6 mm
Weight (fully loaded)	11.2 kg (24.7 lb)	11.2 kg (24.7 lb)
Environment parameters	Operating temperature: 0°C to 40°C (32°F to 104°F) (0 m to 1,800 m) Storage temperature: -40°C to +70°C (-40°F to 158°F) Relative humidity: 5% RH to 95% RH, non-condensing	
Operating voltage	AC: 90 V to 290 V	
Maximum power consumption	431 W	444 W

Ordering Information


Mainframe		
CE7855-32Q-EI	CE7855-32Q-EI Switch (32-Port 40GE QSFP+, Without Fan and Power Module)	
CE7855-EI-F-B00	CE7855-32Q-EI Switch (32-Port 40GE QSFP+, 2*AC Power Module, 2*FAN Box, Port-side Exhaust)	
CE7855-EI-B-B00	CE7855-32Q-EI Switch (32-Port 40GE QSFP+, 2*AC Power Module, 2*FAN Box, Port-side Intake)	
CE7850-EI-B00	CE7850-32Q-EI Switch (2*600W AC Power Module, 2*FAN Box, Port side exhaust)	
CE7850-32Q-EI	CE7850-32Q-EI Switch (32-Port 40GE QSFP+, Without Fan and Power Module)	
Fan box		
Part Number	Product Description	Support Product
FAN-40HA-F	Fan box (HA, Front to Back, FAN panel side intake)	CE7850-32Q-EI, CE7855-32Q-EI
FAN-40HA-B	Fan box (HA, Back to Front, FAN panel side exhaust)	CE7850-32Q-EI, CE7855-32Q-EI
Power		
Part Number	Product Description	Support Product
PAC-600WA-F	600W AC Power Module (Front to Back, Power panel side intake)	CE7850-32Q-EI, CE7855-32Q-EI
PAC-600WA-B	600W AC Power Module (Back to Front, Power panel side exhaust)	CE7850-32Q-EI, CE7855-32Q-EI
Software		
CE-LIC-VXLAN	VXLAN function	
CE78-LIC-FCF16	CloudEngine 7800 FCF 16 Ports license	
CE78-LIC-FCFAL	CloudEngine 7800 FCF All Ports	
CE78-LIC-NPV	CloudEngine 7800 FCOE NPV Function	

Networking and Application

Data Center Applications

On a typical data center network, CE12800/CE8800/CE7800 switches work as core switches, whereas CE6800 and CE5800 switches work as ToR switches and connect to the core switches using 100GE/40GE/10GE ports. These switches use fabric technology such as TRILL or VXLAN to establish a non-blocking large Layer 2 network, which allows large-scale VM migrations and flexible service deployments.

Note: TRILL and VXLAN can be also used on campus networks to support flexible service deployments in different service areas.

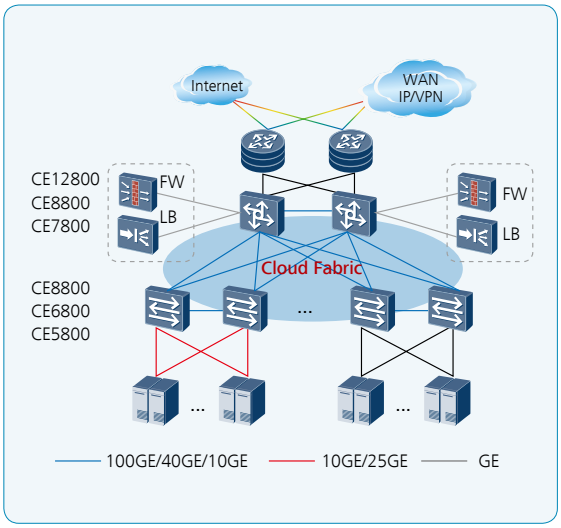


Campus Network Applications

The CE7800 can be used on a campus network. Its high-density, line-speed 40GE ports and high stacking capability can meet the ever-increasing demand for network bandwidth. CE7800 switches are cost-effective campus network switches, thanks to their extensive service features and innovative energy-saving technologies.

On a typical campus network, multiple CE12800/CE8800/CE7800 switches are virtualized into a logical core switch using CSS or iStack technology. Multiple CE6800 switches at the aggregation layer form a logical switch using iStack technology. CSS and iStack improve network reliability and simplify network management. At the access layer, CE5800 switches are virtualized with cloud fabric technology, such as SVF or M-LAG (vertical virtualization), to provide high-density line-rate ports.

Note: CSS, iStack, SVF, and M-LAG are also widely used in data centers to facilitate network management.

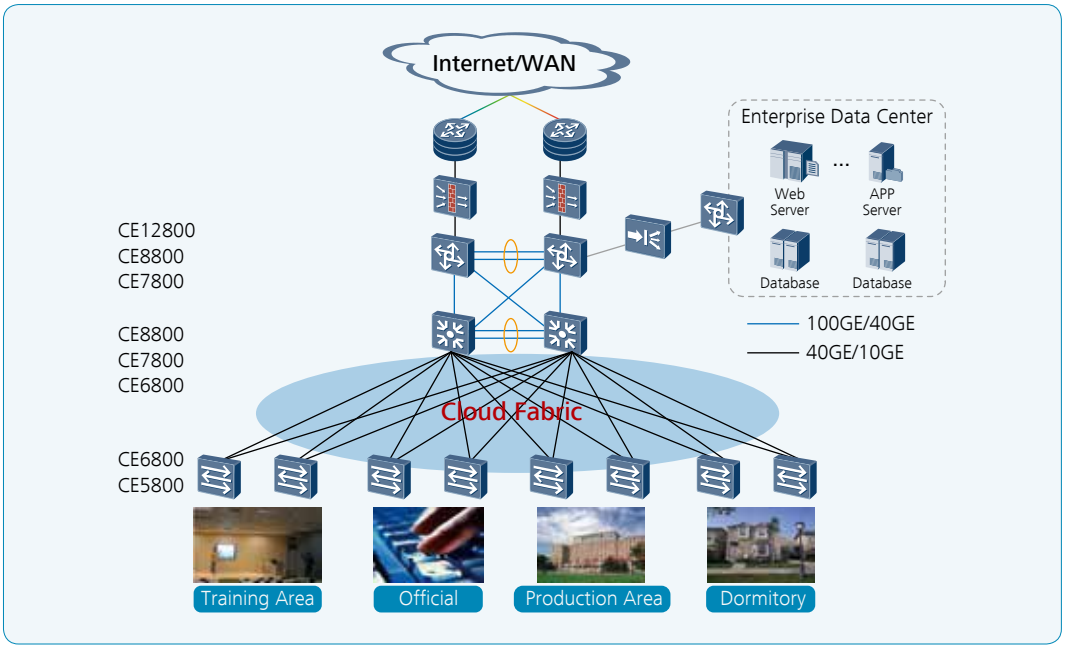

Copyright © Huawei Technologies Co., Ltd. 2016. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademark Notice

, HUAWEI, and are trademarks or registered trademarks of Huawei Technologies Co., Ltd.
Other trademarks, product, service and company names mentioned are the property of their respective owners.

General Disclaimer

The information in this document may contain predictive statements including, without limitation, statements regarding the future financial and operating results, future product portfolio, new technology, etc. There are a number of factors that could cause actual results and developments to differ materially from those expressed or implied in the predictive statements. Therefore, such information is provided for reference purpose only and constitutes neither an offer nor an acceptance. Huawei may change the information at any time without notice.

HUAWEI TECHNOLOGIES CO.,LTD.
Huawei Industrial Base
Bantian Longgang
Shenzhen 518129,P.R.China
Tel: +86 755 28780808

www.huawei.com